

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)


PCT

(10) International Publication Number
WO 2005/020774 A1

- (51) International Patent Classification⁷: **A47K 3/38** (74) Agent: **HANSSON THYRESSON PATENTBYRÅ AB**;
Box 73, S-201 20 Malmö (SE).
- (21) International Application Number:
PCT/SE2004/001246 (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
- (22) International Filing Date: 31 August 2004 (31.08.2004)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
0302353-8 3 September 2003 (03.09.2003) SE
- (71) Applicant (for all designated States except US): **CARL-
SRUM DESIGN AB** [SE/SE]; Traktorvägen 17, S-226 60
Lund (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **JONSON, Carl**
[SE/SE]; Iliongränd 191, S-224 72 Lund (SE).
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: AN ARRANGEMENT FOR SCREENING-OFF A SPACE

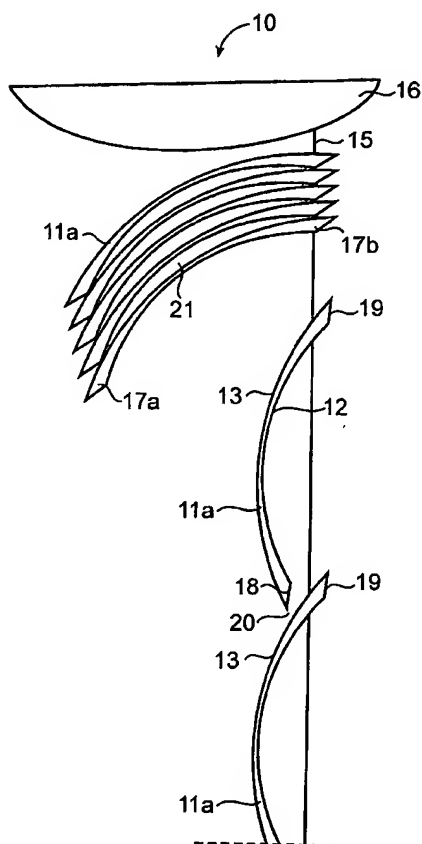

(57) Abstract: The invention relates to an arrangement (10) for screening-off a first space from a second space and for preventing liquid from splashing outside the first space, comprising a liquid-repellent element displaceable between a first position screening-off the first space and an open second position. The liquid-repellent element includes a plurality of elongate slats (11) mutually interconnected by the intermediary of at least one ladder (14) and with a first side (12), a second side (13), a first longitudinal side (18) and a second longitudinal side (19), the slats (11) being, by the intermediary of at least one operating element (15), displaceable in a vertical direction between the screening-off first position and the open second position. The first side (12) of each respective slat (11) is designed with at least one projecting portion (17), the projecting portion (17) being designed for abutment against the second side (13) of an adjacent slat (11) in the open, second position while forming at least one air gap (21) between adjacent slats (11).



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report